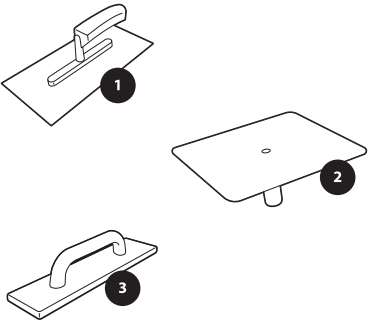




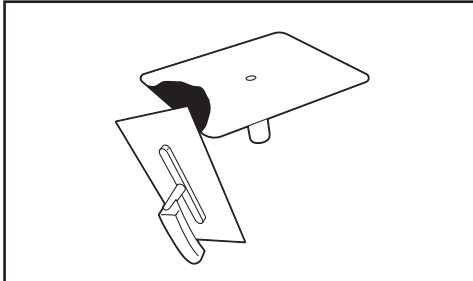
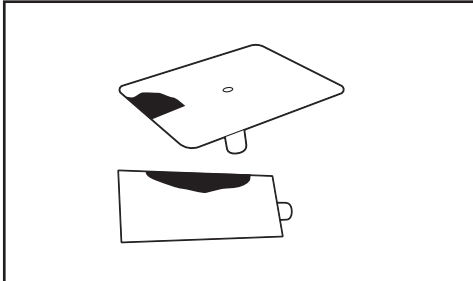
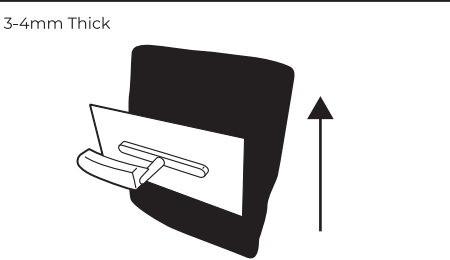
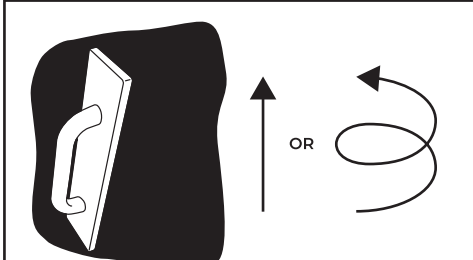

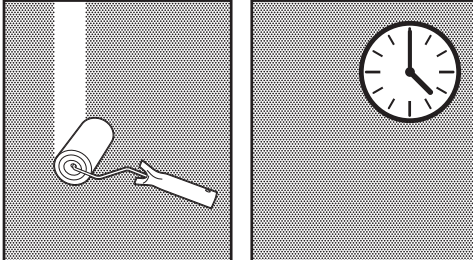


REQUIRED TOOLS	STEP 1	PREPARATION	STEP 2	THE FIRST SCOOP	STEP 3	LOADING TROWEL
 <p>1: Stainless Steel Plastering Trowel 2: Plastering Hawk 3: 3mm Plastic Floater</p> <p>Using a Stainless Steel Plastering Trowel would ensure no rust is transferred from trowel to design area.</p>	 <p>REMOVE LOOSE PAINT</p>  <p>CLEAN SURFACES</p>  <p>APPLY UNDERCOAT</p>  <p>24 HOURS DRYING TIME</p> <ul style="list-style-type: none"> <li>Remove loose / flaking paint</li> <li>Clean surface</li> <li>Apply one coat of DaVinci 2 in 1 Crack Filler &amp; Base Coat to fill cracks &amp; prime the surface.</li> <li>For best results allow 24 hours drying time for DaVinci 2 in 1 Crack Filler &amp; Base Coat.</li> </ul>		 <p>LOAD THE PLASTERING HAWK</p> <p>Scoop a palm size amount of DaVinci Gamazine Decorative Plaster onto the edge of your plastering hawk.</p> <p>Tip: Working with smaller amounts is easier to handle.</p>		 <p>LOAD THE PLASTERING TROWEL</p> <p>Scoop up roughly half of that DaVinci Gamazine Decorative Plaster from the plastering hawk onto your stainless steel plastering trowel.</p>	
<p><b>STEP 4</b>      <b>APPLYING PRODUCT</b></p>	<p><b>STEP 5</b>      <b>FINISHING TOUCH</b></p>	<p><b>STEP 6</b>      <b>CLEANING</b></p>	<p><b>STEP 7</b>      <b>SEALING</b></p>			
 <p>3-4mm Thick</p> <p>APPLY THE PRODUCT</p> <p>Once you've loaded your Stainless Steel Plastering Trowel, Apply the product onto the desired surface swiping from bottom to top. Aim to keep the application as thin as 3-4mm for the best coverage results.</p> <p><b>Tip:</b> Swiping from side to side would assist in removing any creases that may form whilst applying the product in a vertical motion.</p>	 <p>CREATE YOUR PATTERN!</p> <p>A short while after applying DaVinci Gamazine Decorative Plaster to the desired surface run the plastic floating trowel over the Plaster in a vertical or circular motion in order to achieve the desired effect.</p> <p><b>Tip:</b> You should ensure that the plastic floating trowel is kept clean during the process of creating your patterns in order to achieve a neat and desirable effect</p>	 <p>WAIT 7 DAYS BEFORE CLEANING</p> <p>Do not attempt to clean DaVinci Gamazine Decorative Plaster within the first 7 days of application.</p>	 <p>SEAL PLASTER</p> <p>24 HOURS DRYING TIME</p> <p>Apply one to two coats of DaVinci Decorative Plaster Sealant for a high gloss finish and further protection.</p> <p>A 24hr drying time is necessary between coats.</p> <p>DaVinci Decorative Plaster Sealant must be applied 24 hours after DaVinci Gamazine Decorative Plaster.</p>			